



## ATTACHING THE ILLUMINATOR

The built-in type illuminator can be used on the Vixen GP and GP-DX equatorial mounts. To built it into the mounts:

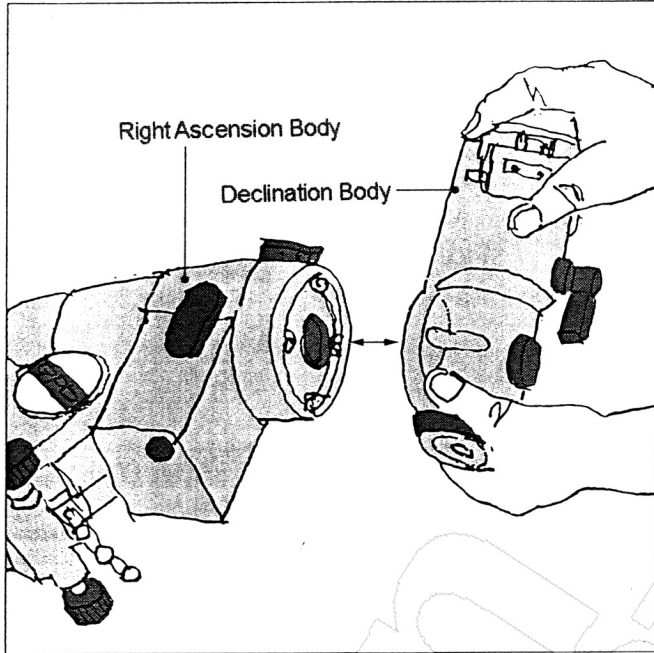

- ① Unscrew the declination body, and detach it from the right ascension body.

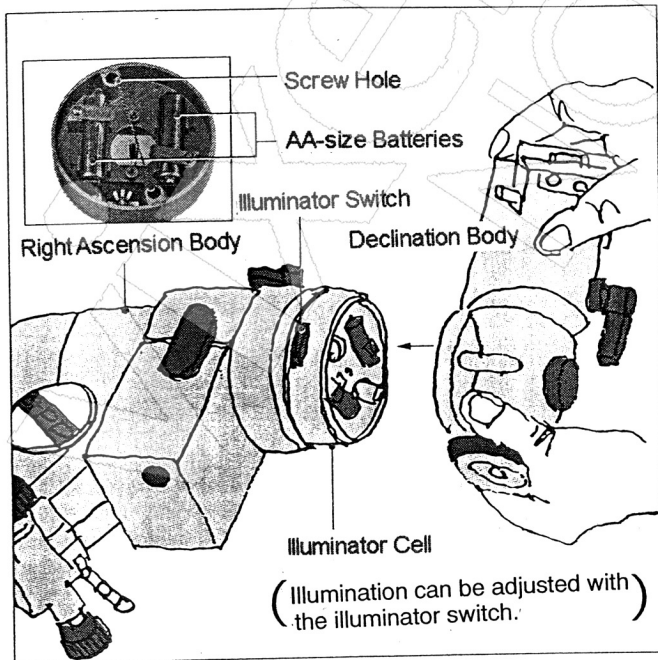

- ② Load two AA-size batteries into the illuminator cell. After loading the batteries, make sure that the light can be on. Place the illuminator cell between the right ascension body and the declination body. Screw the declination body and the illuminator cell to the right ascension body. If you have somebody hold the illuminator cell, it can be done with ease. (Note: The illuminator is not provided with the batteries.)